

PWCA-260K

PSATEK

Specializing in RF & Microwave Components

Psatek Waveguide to Coax Adapters, 21.7~33GHz, WR34~2.92mm(f), Right Angle ,FBP260

FEATURES:

- Low VSWR
- Up to 33GHz

APPLICATIONS:

- Wireless
- General Purpose Test

ELECTRICAL SPECIFICATIONS:

FREQUENCY RANGE(GHz)	21.7~33GHz
IMPEDANCE	50Ω
VSWR	1.2 max


ENVIROMENTAL SPECIFICATIONS:

OPERATING TEMPERATURE	-40℃~+70℃
-----------------------	-----------

MECHANICAL SPECIFICATIONS:

RF CONNECTOR	2.92mm Female
INTERFACE	WR34
WAVEGUIDE BODY	Copper, black or grey painted
FLANGE	FBP260
CONNECTOR BODY	Passivated stainless steel
CENTER CONTACT	Gold plated beryllium copper

OUTLINE DRAWINGS(mm):

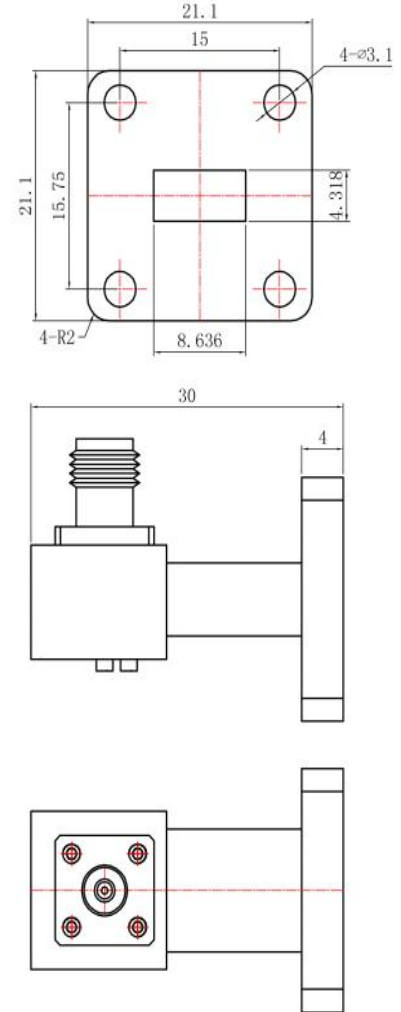

PSATEK INC.

Specializing in RF & Microwave Components

5F, Unit 1, Blg 4, No. 486,
Guanghua East, 3rd Road,
Qingyang District, Chengdu, China

Phone: +86 17882494562

Email: sales@psatek.com

www.psatek.com