

PWCA-620V

PSATEK

Specializing in RF & Microwave Components

Psatek Waveguide to Coax Adapters, 50~67GHz, WR15~1.85mm(f), Right Angle , FUGP620

FEATURES:

- Low VSWR
- Up to 67GHz

APPLICATIONS:

- Wireless
- General Purpose Test

ELECTRICAL SPECIFICATIONS:

FREQUENCY RANGE(GHz)	50~67GHz
IMPEDANCE	50Ω
VSWR	1.4 max
INSERTION LOSS	0.7dB max




ENVIROMENTAL SPECIFICATIONS:

OPERATING TEMPERATURE	-45℃ ~ +125℃
-----------------------	--------------

MECHANICAL SPECIFICATIONS:

RF CONNECTOR	1.85mm Female
INTERFACE	WR15
WAVEGUIDE BODY	Copper, Gold Plated
FLANGE	FUGP620
CENTER CONTACT	Gold Plated Beryllium Copper
CONNECTOR BODY	Passivated Stainless Steel

OUTLINE DRAWINGS(mm): Tolerance±1%

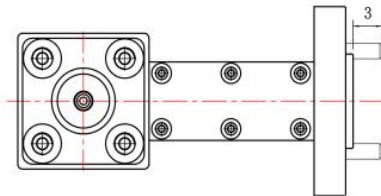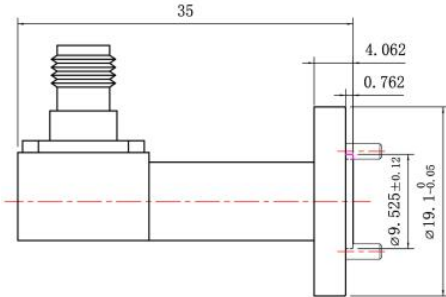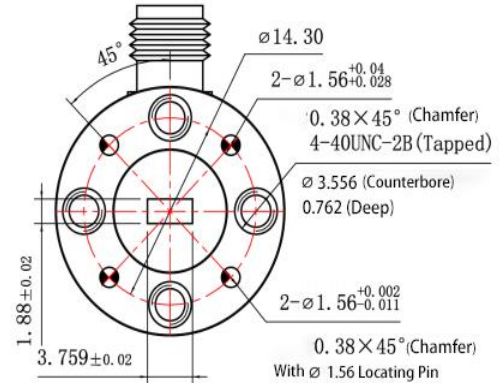

PSATEK INC.

Specializing in RF & Microwave Components

5F, Unit 1, Bldg 4, No. 486,
Guanghua East, 3rd Road,
Qinyang District, Chengdu, China

Phone: +86 17882494562

Email: sales@psatek.com

www.psatek.com